

CUBA★LUX


ΔΙΑΚΟΠΤΗΣ RF ΑΦΗΣ SIMPLICITY 1-4 ΖΩΝΕΣ
Για έλεγχο φωτισμού (dimming) με μπαταρία.



Τεχνικά χαρακτηριστικά

- Σήμα εξόδου: RF(2.4GHz)
- Τάση λειτουργίας: 3VDC(2xAAA)
- Ρεύμα λειτουργίας: < 20mA
- Ρεύμα αναμονής: < 20μA
- Χρόνος αναμονής: 12 μήνες
- Απόσταση λειτουργίας: 30 μέτρα
- Θερμοκρασία λειτουργίας: -30°C~55°C
- Διαστάσεις: M86×Π86×Υ20,50mm
- Βάρος: 155g


Διαστάσεις

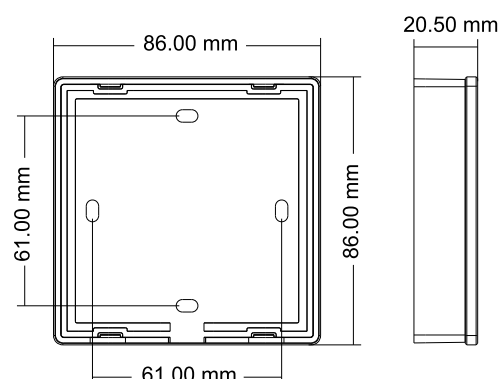

Πως να συγχρονίσετε τον διακόπτη RF με τον Controller

Πιέστε το match key στον controller, και εντός 5 δευτερολέπτων πιέστε το κουμπί (I) οη της ζώνης που επιθυμείτε στον διακόπτη.

Λειτουργία διακόπτη

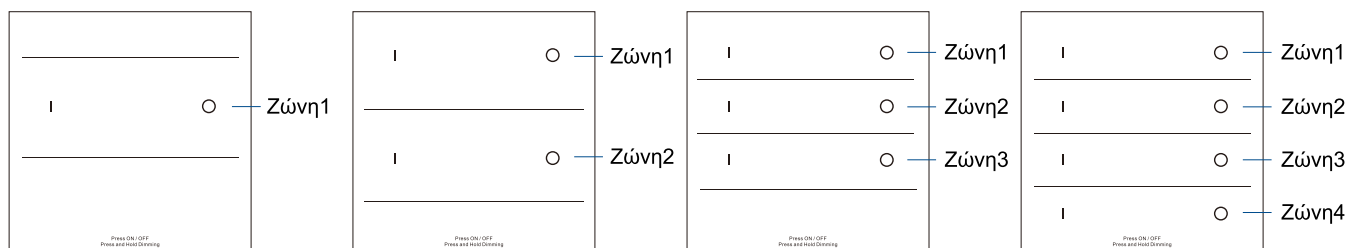



I — Έναρξη λειτουργίας

- Πιέστε μία φορά για έναρξη λειτουργίας ζώνης.
- Πιέστε παρατεταμένα για αύξηση φωτεινότητας όταν το φως είναι αναμμένο.

O — Παύση λειτουργίας

- Πιέστε μία φορά για παύση λειτουργίας ζώνης. T
- Πιέστε παρατεταμένα για μείωση φωτεινότητας όταν το φως είναι αναμμένο.
- Πιέστε παρατεταμένα όταν το φως είναι σβηστό για απενεργοποίηση του ηχητικού τόνου λειτουργίας.

Τοποθέτηση διακόπτη

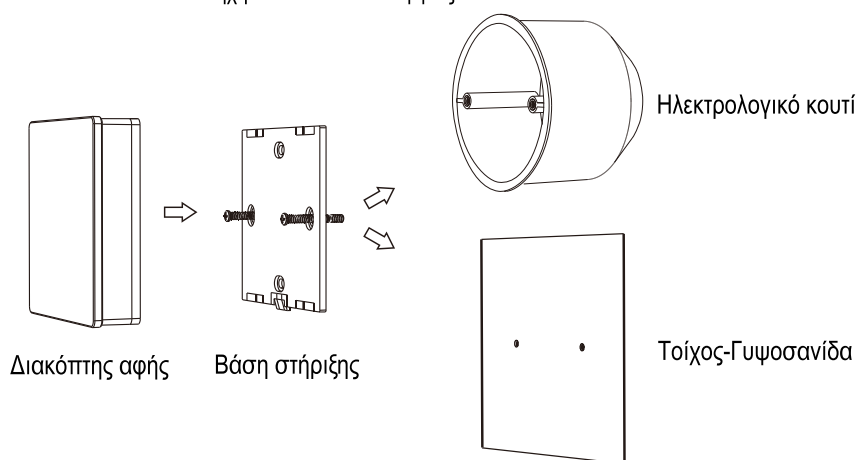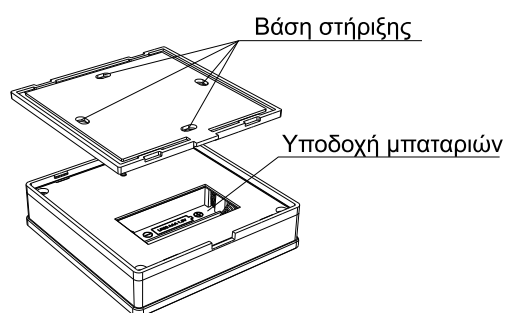

Δυσλειτουργία και αντιμετώπιση

Δυσλειτουργία	Αιτία	Αντιμετώπιση
Καμία λειτουργία	1. Εξασθενημένη μπαταρία 2. Εκτός απόστασης ελέγχου 3. Το χειριστήριο και ο controller δεν είναι συγχρονισμένοι	1. Αλλάξτε μπαταρία. 2. Μειώστε την απόσταση ελέγχου 3. Συγχρονίστε το χειριστήριο με τον controller

CUBA LUX WALL MOUNTED RF TOUCH PANEL SIMPLICITY 1-4 ZONES


For dimming with battery function



Technical specifications

- Output signal: RF(2.4GHz)
- Working voltage : 3VDC(2xAAA)
- Working current: < 20mA
- Standby current: < 20μA
- Standby time: 12 months
- Remote distance: 30m
- Working temperature: -30°C~55°C
- Dimension: L86×W86×H20,50mm
- Weight: 155g





Dimensions

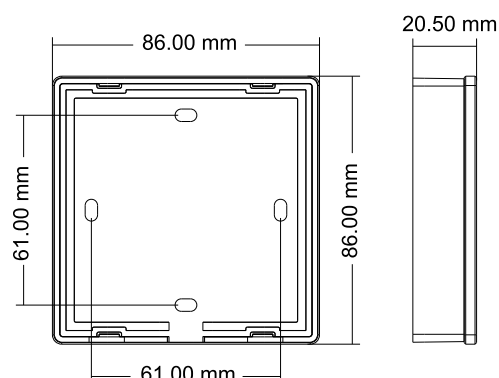

How to match the remote with Controller

Short press match key on the controller, within 5s press the (I) on key on the panel.

Remote control function





I — ON key

- Short press: Turn on the light of each zone.
- Long press(1-6s): Dimming up when light is on.

O — OFF key

- Short press: Turn off the light of each zone.
- Long press(1-6s): Dimming down when light is on.
- Long press(5s): Turn on or turn off tone when light is off.

Touch panel Installation

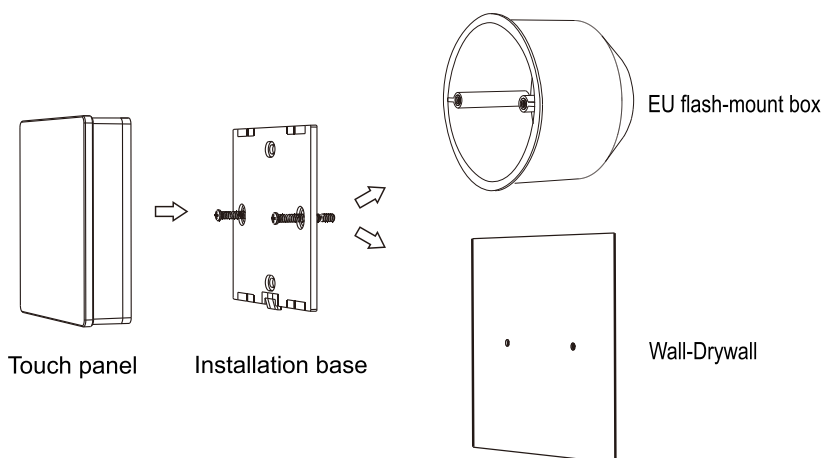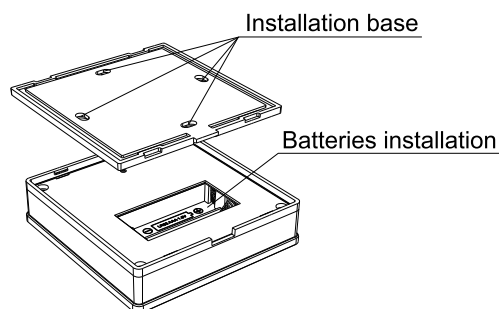

Malfunctions & troubleshooting

Mulfuctions	Causes	Troubleshooting
No response of the remote	1. The battery has no power. 2. Beyond controllable distance. 3. The controller did not match the remote.	1. Replace battery. 2. Reduce remote distance. 3. Re-match the remote.