


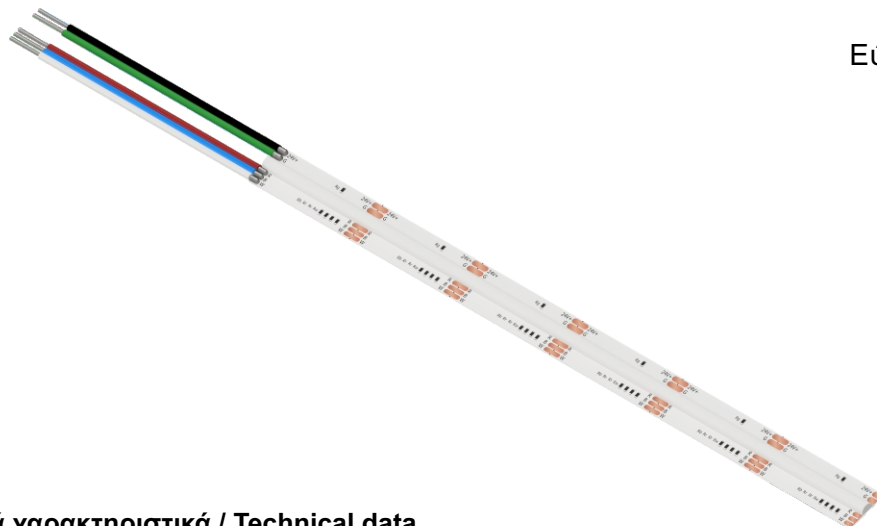

Εύκαμπτη ταινία led / Flexible led strip

TORA COB

Κωδικός / Art. No. : 502114

24Vdc

18 Watt/m

RGBW


840led/m

IP20

3 ΧΡΟΝΙΑ ΕΓΓΥΗΣΗ
YEARS WARRANTY**Τεχνικά χαρακτηριστικά / Technical data**

Κατανάλωση ενέργειας / Power consumption	18 kWh/1000h/m
Ονομαστική Ισχύς / Rated wattage	18 W/m
Τάση λειτουργίας / Operating Voltage	24Vdc
Ρεύμα λειτουργίας / Typical operating Current	0.75 A/m
Κατηγορία προστασίας / Protection class	III
Ρύθμιση έντασης φωτισμού / Dimming	PWM (Dali / DMX512 / RF / Push Button)
Φωτεινή απόδοση / Luminous Efficacy	R34, G93, B19, W92 (lumen/watt)
Φωτεινή ροή / Typical Luminus Flux	R154, G419, B86, W414 (lumen/m)
Γωνία φωτισμού / Led beam angle	140°
Χρώμα / Color	RGBW
Μήκος κύματος / Wavelength	R623±5, G520±, B465±5 (nm)
Θερμοκρασία χρώματος / Typical CCT	3000K
Βαθμός χρωματικής απόδοσης / Typical CRI	>80
Ανοχή Χρώματος /Color Tolerance	5 SDCM
Διάρκεια ζωής στους 25 °C / Rated life time at 25 °C	30.000 ώρες/hours
Βαθμός στεγανότητας / Ingress protection	IP20
Λειτουργία σε θερμοκρασία περιβάλλοντος / Ambient working Temp. ta	-20...+50°C
Διαστάσεις (ΜxΠxΥ) / Dimension (LxWxH)	5000 x 12 x 2(mm)
Μέγιστο μήκος λειτουργίας / Max. operating Length	5 μέτρα / 5 meters
Αριθμός Led / Led units	840 led/μέτρο / 840 led/meter
Σημείο κοπής / Cutting point	Ανά 33.33mm / Per 33.33mm
Συσκευασία / Packing	5 μέτρα / 5 meters
EAN	5206704014519
Εγγύηση / Warranty	3 χρόνια / 3 years

(Όλες οι τιμές μπορεί να έχουν μία απόκλιση +/-5% - All values can have a tolerance of +/- 5%)

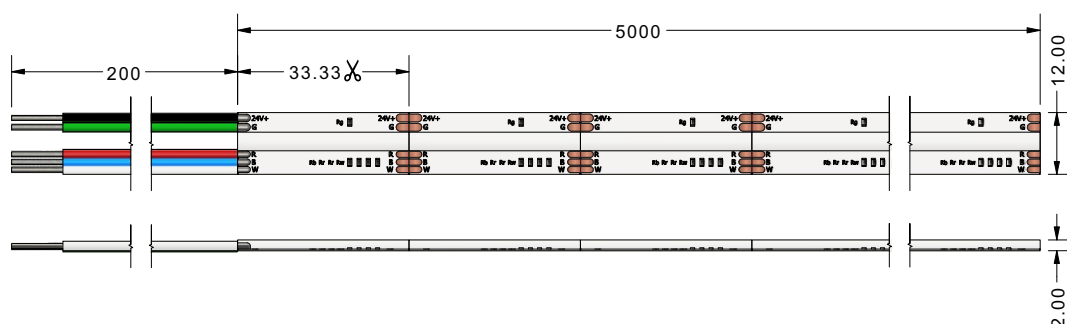Σχέδιο - Διαστάσεις / Drawing - Dimensions

IP-20

LED
PCBΚατάλληλη για ξηρούς εσωτερικούς χώρους με χαμηλή συγκέντρωση αιωρούμενων σωματιδίων.
Suitable for dry interiors with low concentration of suspended particles.

Light efficiency:

34 Lumen/Watt


Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 154 Lumen Power consumption: 4.5





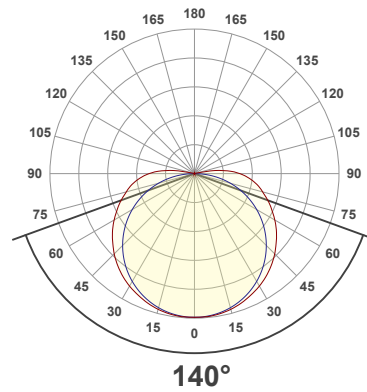


Product name:

**TΩRA COB 18Watt 840led 24V
IP20 RGBW(RED)**

Item number:

502114

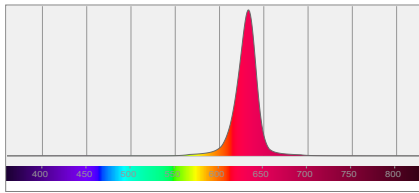


CRI R values

A blank coordinate grid for plotting. The horizontal axis is labeled with points R_1 through R_{15} . The vertical axis has 5 unlabeled horizontal grid lines.

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.696	0.304	0.529	0.347	n/a

Beam details

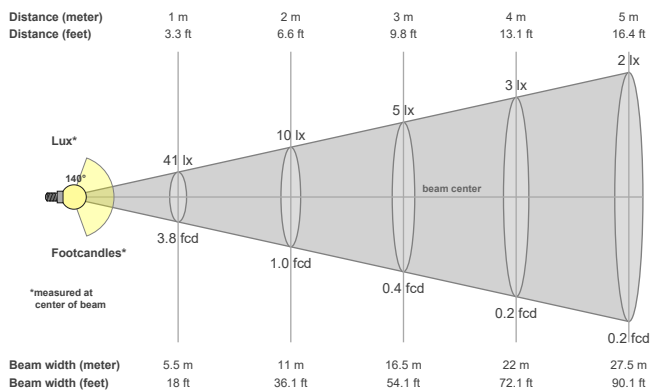

Beam angels

Beam angle	Field angle	Cutoff angle
50%	10%	2,5%
140°	184.6°	192°


Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
40.9 cd	65.6%	42.8%

Beam intensities from 1-20m

[illegible]

Power scope



Power	Power factor	
4.5 W	1.0	

Voltage	Current	
24.0 V	0.188 A	

Light efficiency:

93 Lumen/Watt


Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 419 Lumen Power consumption: 4.5






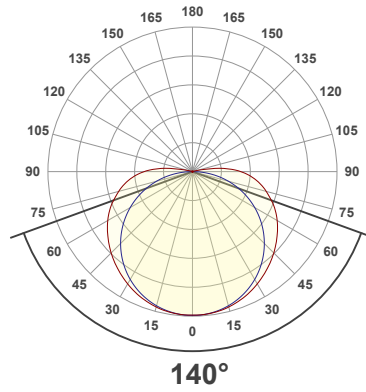


Product name:

**TΩRA COB 18Watt 840led 24V
IP20 RGBW(GREEN)**

Item number:

502114

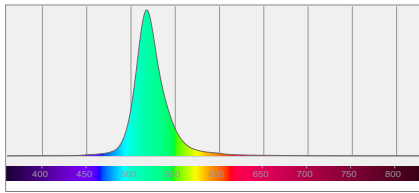


CRI R values

A blank coordinate grid for plotting. The horizontal axis is labeled with 15 points: $R_1, R_2, R_3, R_4, R_5, R_6, R_7, R_8, R_9, R_{10}, R_{11}, R_{12}, R_{13}, R_{14}, R_{15}$. The vertical axis has 5 unlabeled horizontal grid lines.

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color diviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.154	0.725	0.054	0.382	n/a

Beam details

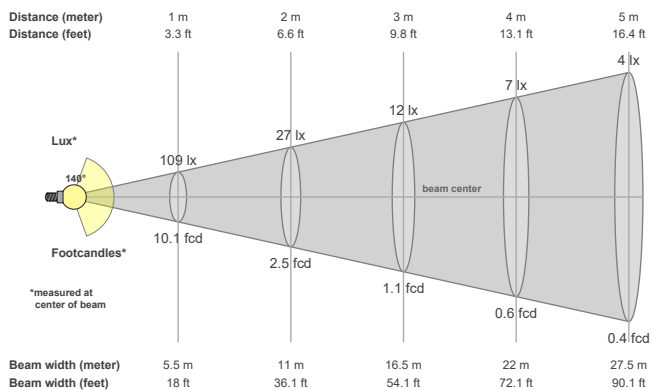

Beam angels

Beam angle	Field angle	Cutoff angle
Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
140°	184.7°	193.6°


Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
109 cd	64.7%	41.9%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
109lx	27lx	12lx	7lx	4lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx
10.1fcd	2.5fcd	1.1fcd	0.6fcd	0.4fcd	0.3fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Power scope



Power	Power factor	
4.5 W	1.0	

Voltage	Current	
24.0 V	0.188 A	

Light efficiency:

19 Lumen/Watt


Light quality:

CRI: 0.0

Color temperature:

0 K

Output: 86.0 Lumen Power consumption: 4.5

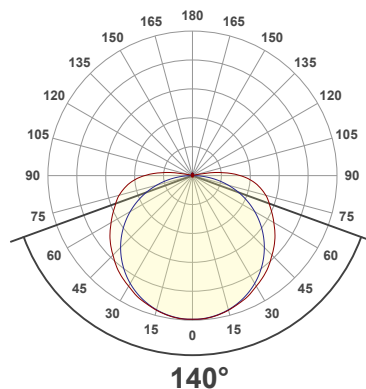


Product name:

**TQRA COB 18Watt 840led 24V
IP20 RGBW(BLUE)**


Item number:

502114


Spectral distribution

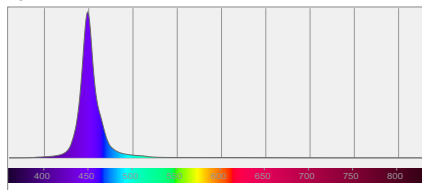

Color coordinates



White color point




CRI R values

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
0 K	0.0	0.0	0.0	0.0	0.0	0.158	0.030	0.208	0.059	n/a

Beam details

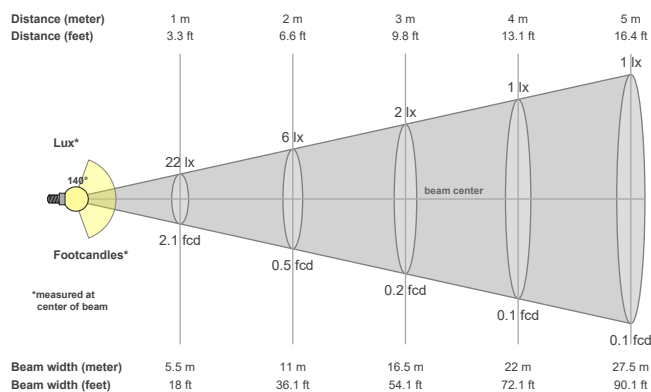

Beam angels

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
140°	184.5°	193.1°


Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
22.5 cd	64.3%	41.8%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
22lx	6lx	2lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx	0lx
2.1fcd	0.5fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Power scope



Power	Power factor	
4.5 W	1.0	

Voltage	Current	
24.0 V	0.188 A	

Light efficiency:

92 Lumen/Watt


Light quality:

CRI: 92.5

Color temperature:

3000 K

Output: 414 Lumen Power consumption: 4.5

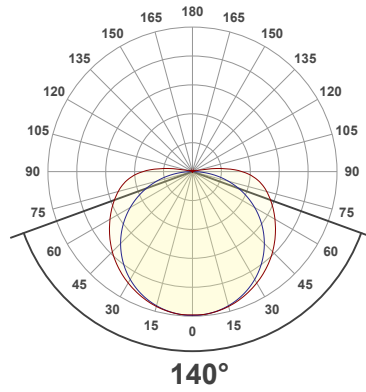


Product name:

**TQRA COB 18Watt 840led 24V
IP20 RGBW(WHITE)**


Item number:

502114


Spectral distribution

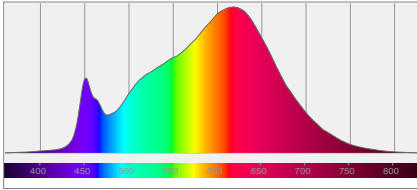


Color coordinates



White color point




CRI R values

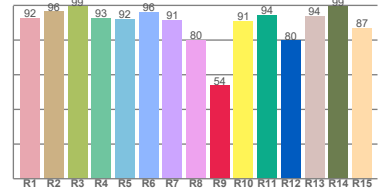

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Color coordinate cie 1931	Color coordinate cie 1931	Color coordinate	Color coordinate	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	x	y	u	v	Δuv
3000 K	92.5	53.7	91.2	97.3	91.1	0.437	0.404	0.251	0.348	0.0016

Beam details

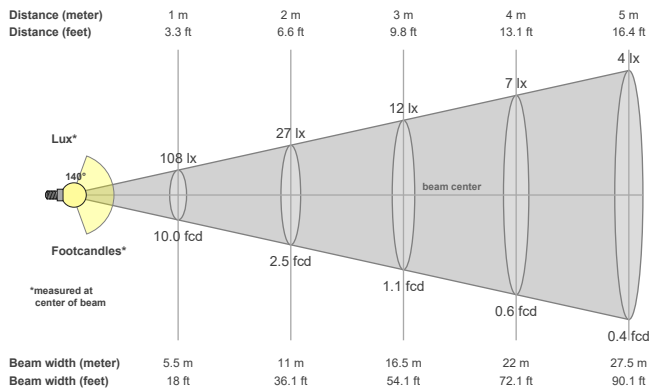

Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
140°	184.4°	193.3°


Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
108 cd	64.4%	41.8%

Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
108lx	27lx	12lx	7lx	4lx	3lx	2lx	2lx	1lx	1lx	1lx	1lx	1lx	1lx	0lx	0lx	0lx	0lx	0lx	0lx
10fcd	2.5fcd	1.1fcd	0.6fcd	0.4fcd	0.3fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd

Power scope



Power	Power factor	
4.5 W	1.0	

Voltage	Current	
24.0 V	0.188 A	